


PLUGS



SOCKETS

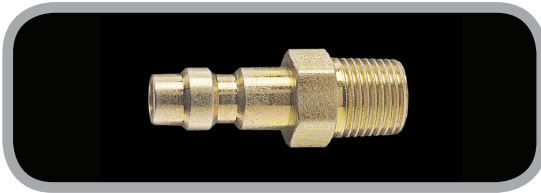

FEATURE

- High flow capability for small coupler
- Only 5/8" diameter
- Socket weighs 1 oz.
- Precision leak-proof seal
- Positive locking mechanism

Manual

Female Thread

1/8 FPT	23-2
1/4 FPT	27-2

Male Thread

1/8 MPT	22-2 ■
1/4 MPT	24-2

Hose Stem (Require Hose Clamps)

1/8 I.D.	02-2
3/16 I.D.	03-2
1/4 I.D.	04-2

Self Storing Air Hose


1/4 I.D.

Reusable Hose Clamp

ID X OD	
3/16 x 3/8	
3/16 x 7/16	
1/4 x 1/2	PB3-2
1/4 x 9/16	PB5-2
1/4 x 5/8	PB7-2
1/4 x 11/16	PB9-2

Plastic & Metal Tubing

.170 x 1/4 Plastic	PJ8-2
1/4 Soft Metal	PJ8-2M




2302

2702



2202 •



2402



2022


2032

2042




SAA-2

SAO-2



SJ8-2


SJ8-2M



Series 2 Plug
Actual Size




Series 2
Socket
Actual Size

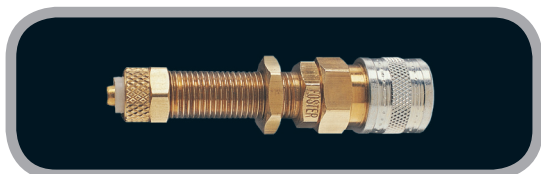

PANEL MOUNT (MAX. PANEL THICKNESS 3/4")

.170 x 1/4 Plastic	SJ8P-2
1/4 Soft Metal	SJ8P-2M

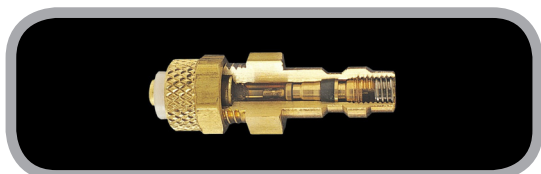

VALVE CORE (BRASS)

.170 x 1/4 Plastic	PJ8-2V
1/4 Soft Metal	PJ8-2VM

- Available In Brass – Suffix B
- Available In 303 Stainless – Suffix S/S