

Compressed Air Blow Guns

LEVER OPERATED
HANDY-AIR™ BLOW GUN



Safety
Controlled-Flow
OSHA
Compliant

BUTTON OPERATED
HANDY-AIR™ BLOW GUN



NICKEL PLATED
HANDY-AIR™ BLOW GUN



Our bright nickel plated, Lever Operated Blow Guns offer the same quality features as the other Handy-Air™ Blow Guns at an economical price.

Pressed Safety Tip	BG2L-30STP	BG2-30STP	
Threaded Safety Tip	BG2L-30STT	BG2-30STT	BG2L-STT
Pressed Standard Tip	BG2L-30P	BG2-30P	
Threaded Standard Tip	BG2L-30T	BG2-30T	

INLET PRESSURE

- 150 PSIG maximum

BODY

- Diecast Zinc

TEMPERATURE

- 32°-180° F

SEAL

- Buna-N

FLOW

- Safety Tip: 19.8CFM@100 PSIG
- Standard Tip: 9.3 CFM@100 PSIG

INLET

- 1/4" FPT

SAFETY TIP - STANDARD TIP

Handy-Air models are available with either the standard or ST safety tip, each of which may be ordered pressed or threaded to the gun. The pressed tip is not removable and prevents tampering. The threaded tip has a 1/8" NPT male thread. The ST safety tip provides a conical shield of air which encircles blown chips or particles directing them away from the operator.




NON-REGULATED BLOW GUNS

Standard model blow guns are available for those installations not requiring reduced pressure. These two diecast models are not OSHA compliant.

- Cat. No. BG2 (Button Operated)
- Cat. No. BG2L (Lever Operated)

BLOWGUN ACCESSORIES

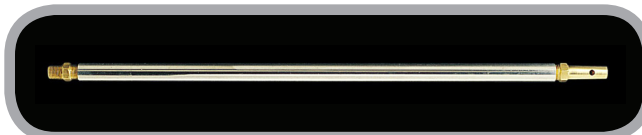

#EX12 12" EXTENSION

- Permanent extension.
- Employs same tip as gun.
- Dynamic and static pressures same as gun installed on.



#EX10DH 10" EXTENSION

- Removable extension, push on, twist off.
- Durable tubing with female tapered fitting.
- Fits snugly on standard or safety tip.

PISTOL GRIP BLOW GUN



Safety Controlled-Flow
OSHA Compliant

FLOW

- 19.8 CFM @ 100 PSIG

SEAL

- Buna-N

BODY

- Nylon 6

INLET

- 1/4" FPT

INLET PRESSURE

- 150 PSIG

TEMPERATURE

- 32° - 120° F

PRESSED SAFETY TIP	PG2P
THREADED SAFETY TIP	PG2T

FEATURES

- OSHA Compliant
- Pistol grip design is more comfortable to operate.
- Trigger/Valve design allows for variable output.
- Safety tip standard
- Trigger serves as a convenient hanging hook.
- Color, safety yellow.



#EX2RT RUBBER TIP

- Protects delicate parts from damage
- Blowguns with rubber tip will not comply with OSHA requirements.
- Installs on all threaded blow guns with 1/8" NPT